

Amphenol+MELNI TECHNOLOGIES



RAD-Crimp® Solar Splice with Melni Spiral Termination Technology

Introducing the Rad-Crimp® Solar Splice with Melni Spiral Termination Technology from Amphenol Industrial Sustainable Technologies (AIST). A robust DC connector rated to UL 1500V DC specifications. The Rad-Crimp® Solar Splice with Melni Spiral Termination Technology removes improper mating from the equation. The Rad-Crimp® will eliminate the timely process of crimping, the need to buy expensive crimping equipment, and will be an overall quicker, safer solution than the PV connectors of the past. This new innovation in technology provides a safe and reliable connection the industry desperately needs.

Features:


- Features Melni Spiral Termination Technology
- Simple and fast termination
- Field termination and sealing without special tools
- Low resistance wire termination and sealing in one action
- IP68 Sealing protection
- Innovative Melni Spiral Termination Technology is low resistance and reliable

RAD-Crimp® Solar Splice with Melni Spiral Termination Technology



Technical Data

Rated Voltage	UL6703 1500V DC
Rated Current (UL)	20A(4.0mm ² /12AWG), 30A(6.0mm ² /10AWG)
Typical Contact Resistance	≤ 0.10mΩ, TYP
Insulation Material	Thermoplastic (PC/PA)
Contact Material	Tin over nickel plated copper alloy
Cable Strain Relief	Compression sealing gland featuring cable insulation gripping collet and torque specified sealing cap
Application Class	Class A
Over Voltage Category	III
Degree Protection	IP68 (1 meter, 1 hour) mated
Flame Class	UL94-V0
Cable OD Range	Ø6.0mm ~ Ø7.4mm
Cable Strands Range	7 ~ 60 strands
Pollution Degree	2
Safety Class	Class II
Ambient Temperature Range	-40°C ~ +85°C
Upper Limiting Temperature	120°C
UV Resistance	Outdoor suitable (f1) rated materials, per UL746C

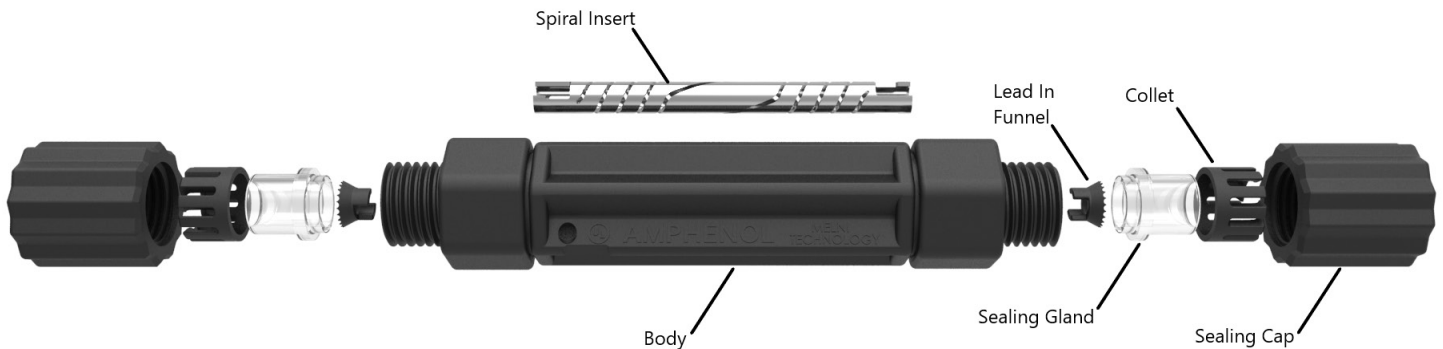

How to Order RAD-Crimp® Solar Splice with Melni Spiral Termination Technology (please choose one code per position, below)

1		2		3		4	
Product Line		Product Type		Contact Size		Terminal Type	
AMPV	Amphenol Solar Connector (Amphe-PV)	STS	Melni Spiral Termination	4*	4.0mm ² /12 AWG 6.0mm ² / 10AWG	M	Machined Terminal

* Contact size "4" works for 4.0mm²/12 AWG & 6.0mm²/10AWG PV wire

Tools and Accessories

Ordering Code

Strip Tool	H4TS0000
Wrench Tool	AMPVTW0001



Wrench Tool



Strip Tool

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

North America:
Amphenol Industrial Operations
482 N. Mariposa Rd, Bldg. A
Nogales, AZ 85621
Tel: (888) 364-9011
Fax: (520) 285-5134
Email: tech@amphenol-aio.com

Europe:
Amphenol Industrial Operations Europe
Via Barbaiana 5
1-20020 Lainate (MI) Italy
Tel: +39 02 93254.204
Fax: +39 02 93254.444
Email: info@amphenol-aio.com

Middle East:
Amphenol Middle East Enterprises FZE
Office C-37 PO Box 21107
Ajman Free Zone, UAE
Tel: +9 716-7422494
Fax: +9 716-7422941
Email: jhussain@amphenol-industrial.com

Asia:
Amphenol Industrial Sustainable Technologies
Building C, 2nd Industrial Zone of XIA Shi Jia
Gongming Sub-district, Guangming New-district
Shenzhen, China 518106
Tel: +86 755-29918389
Email: tech@amphenol-industrial.com